

" OCXO " [Oven Controlled Crystal Oscillators]

OC12T

Square Wave

OC12E

True Sine Wave

Best stability

± 10 ppb

Standard
OCXO Series

SMD

3.3V

5.0V

Min.


5 MHz

Max.

40 MHz

Applications



- OC12_ (25.4 * 22.1 * 11.0 mm)
- +3.3V , +5.0V Supply Voltages
- Voltage control (Electronic Frequency Tuning) is standard .

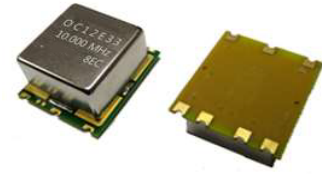

General Specifications (at+25°C and specified input voltage)

Output Waveform		Square wave. Waveform code is " T "		True Sine Wave. Waveform code is " E "					
Supply Voltage		+3.3 V	+5.0 V	+3.3 V	+5.0 V				
Supply Voltage range , " Voltage code "		+3.3V ± 5% , " 3 "	+5.0V ± 5% , " 5 "	+3.3V ± 5% , " 3 "	+5.0V ± 5% , " 5 "				
Frequency Range		5 ~ 40.0 MHz		5 ~ 40.0 MHz					
Initial Calibration Tolerance		± 200 ppb (max.)	± 200 ppb (max.)	± 200 ppb (max.)	± 200 ppb (max.)				
		Vcon = +1.65 V	Vcon = +2.5 V	Vcon = +1.65 V	Vcon = +2.5 V				
Type of Crystal Cut Used		" SC - cut " crystal or " IT - cut " crystal							
Frequency Stability		± 5 ppb (max.) over 0°C to +70°C							
		vs Temperature (refer to +25°C)							
		± 10 ppb (max.) over -30°C to +70°C							
		± 10 ppb (max.) over -40°C to +85°C							
Voltage Control On pin 1 (EFC)		vs Voltage Change							
		± 0.5 ppb (max.) , for a ± 5% input voltage change .							
		vs Warm-up time (+25°C)							
(Electronic Freq. Tuning)		10 minute (max.) Within ± 10 ppb of its reference frequency.							
		vs Aging							
		± 0.5 ppb (max.) / after 30 days ; ± 50 ppb (max.) / first year ; ± 400 ppb (max.) over 10 years.							
Power		Freq. Deviation Range							
		± 0.5 ppm (min.) , ±5 ppm (max.) Reference to fo at +25°C and over operating temperature range.							
		Control Voltage Range		+1.65V ± 1.65V		+2.5V ± 2.5V			
Output		Transfer Function							
		Positive : Increasing control voltage increases output frequency .							
		Input Impedance		50 K ohms (min.)					
Phase Noise		EFC Linearity							
		± 10 % (max.)							
		Power Dissipation (at +25°C)		1.2 Watts (max.) at steady-state; 1000 mA (max.) at turn-on.					
Output		Output Level (for True Sine)		---		+8 dBm (typ.) , +10 dBm (max.)			
		Harmonic (for True Sine)		---		-30 dBc (max.)			
		Spurious (for True Sine)		---		-60 dBc (max.)			
		Load		15pF		50 Ω			
		Output Logic High (V _{OH})		+2.4 V (min.)		+2.4 V (min.)		---	
		Output Logic Low (V _{OL})		+ 0.4 V (max.)		+ 0.4 V (max.)		---	
		Duty Cycle (V _{DD})		50 % ± 5% @ +1.4V					
		Rise and Fall Time		7 nsec. (max.) (20% → 80% of waveform)					
Phase Noise Offset [10.0 MHz] (typ.)		1 Hz		10 Hz		1 KHz			
		-98 dBc		-126 dBc		-145 dBc			
						10 KHz			
						-152 dBc			

Outline Dimensions (Unit : ±0.2 mm)

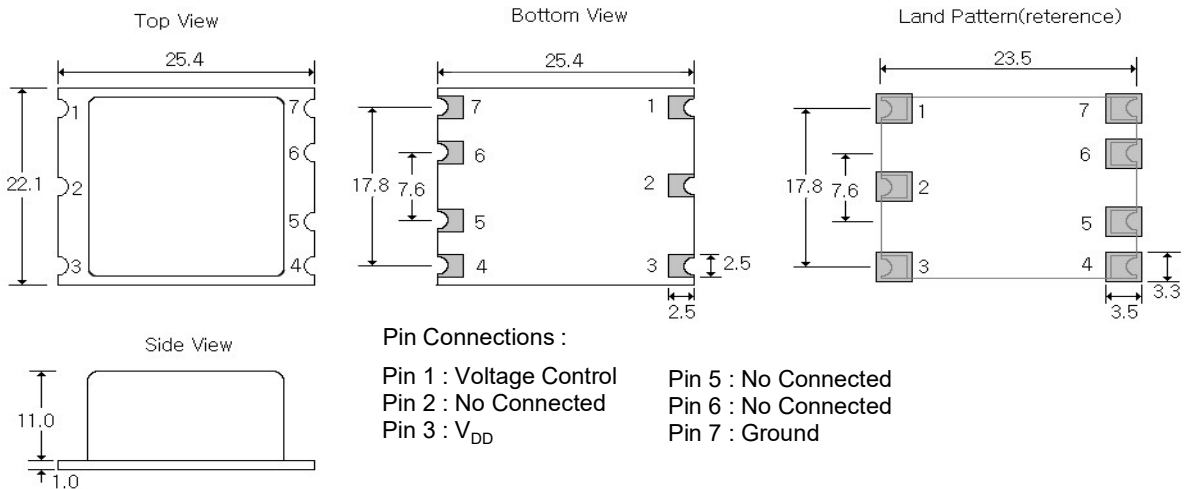

MATEL Centre d'affaires Laroiseau 1 rue Anita Conti 56000 VANNES

+33 (0)2 97 60 98 34 www.matel-piezo.fr

" OCXO " [Oven Controlled Crystal Oscillators]

Square wave " OC _ T "

Clipped Sine Wave " OC _ S "

True Sine Wave" OC _ E "


Part Number Format and Example

	[1]	[2]	[3]	-	[4]	-	[5]	/	[6]
	Holder Type	Output Wave	Supply Voltage		Center Frequency		Frequency Stability		Operating Temp. Range
Examples	(1)	OC12	E	3	10.000	200	0+70		
	(2)	OC18	E	12	100.000	100	-30+70		
	(3)	OC51	S	3	10.000	30	-20+70		
	(4)	OC14	T	5	5.000	10	-40+85		


- Ex (1) : OC12E3 - 10.000 - 200 / 0+70 [OC12 type , True Sine wave , 3.3V , 10.000MHz , ± 200ppb from 0°C to 70°C]
- Ex (2) : OC18E12 - 100.000 - 100 / -30+70 [OC18 type , True Sine wave , 12V , 100.000MHz , ± 100ppb from -30°C to 70°C]
- Ex (3) : OC51S3 - 10.000 - 30 / -20+70 [OC51 type , Clipped Sine Wave , 3.3V , 10.000MHz , ± 30 ppb from -20°C to 70°C]
- Ex (4) : OC14T5 - 5.000 - 10 / -40+85 [OC14 type , Square Wave , 5.0V , 5.000MHz , ± 10 ppb from -40°C to 85°C]

[1]	Holder Type " OC__ " stands for OCXO ,
[2]	" T " stands for Square Wave , " E " stands for True Sine Wave , " S " stands for Clipped Sine Wave ex 1 : OC14T, OC14 package, Square Wave output ; ex 2 : OC18E, OC18 package, True Sine wave ; ex 3 : OC51S, OC51 package, Clipped Sine Wave
[3]	Supply voltage , " 3 " for 3.3V D.C , " 5 " for 5.0V D.C , " 12 " for 12V D.C
[4]	Center Frequency in MHz
[5]	Frequency stability in ± _ ppb ; ex 1 : ±200ppb ---200 , ex 2 : ± 30ppb ---30 , ex 3 : ± 5ppb --- 5
[6]	Operating temperature range in °C ex 1 : 0 °C to 70°C ----- 0+70 ; ex 2 : -30 °C to 70°C ----- -30+70 ; ex 3 : -40 °C to 85°C ----- -40+85


SSB Phase Noise : Clipped Sine Wave(OC51S-20.000)

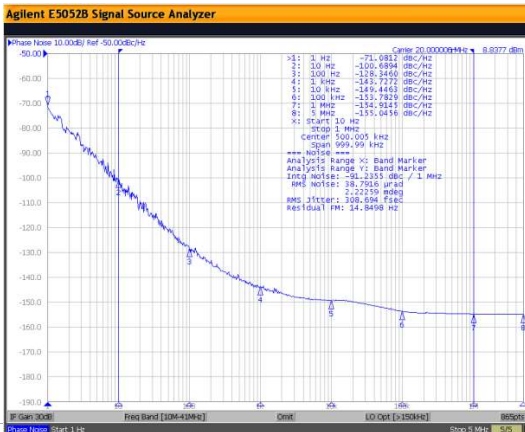

SSB Phase Noise : Square wave(OC13T-10.000)

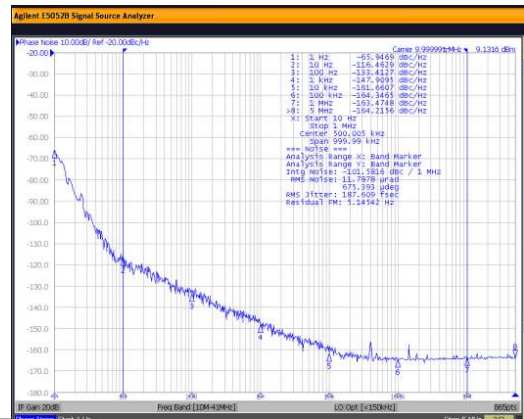

Aging : OC51S-20.000

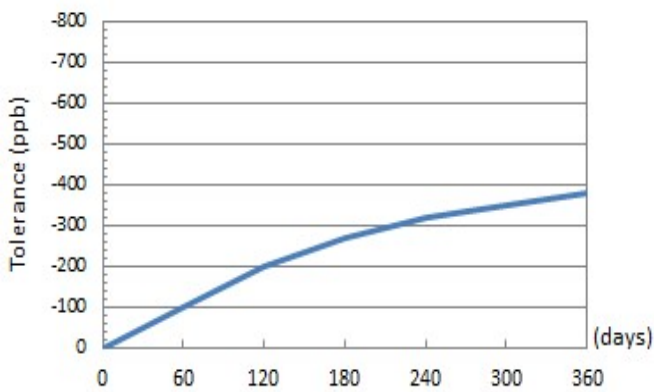

Power Consumption vs Temperature (OC13T5-10.000)

